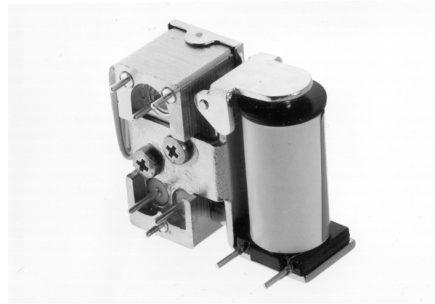


50Ω Koaxrelais

Preise einschl. Mehrwertsteuer

...Für Leiterkartenmontage

Max. Input Power: 150W PEP at 500MHz
 Insertion Loss: $\leq 0,2\text{dB}$ at 500MHz
 Crosstalk: $\geq 35\text{dB}$ at 500MHz
 VSWR: 1:1,08 at 1GHz
 Supply Voltage: 12V, min 9V DC
 Current Consumption: 80mA at 12V

**CX120P****34,00€**

1006851

...Für Koaxkabel

Max. Input Power: 150W PEP at 500MHz
 Insertion Loss: $\leq 0,2\text{dB}$ at 500MHz
 Crosstalk: $\geq 35\text{dB}$ at 500MHz
 VSWR: 1:1,08 at 1GHz
 Supply Voltage: 12V, min 9V DC
 Current Consumption: 80mA at 12V

**CX120A****37,50€**

1006852

Cable connections for RG58C/U


Max. Input Power: 200W PEP at 500MHz
 Insertion Loss: $\leq 0,2\text{dB}$ at 500MHz
 Crosstalk: $\geq 30\text{dB}$ at 500MHz
 VSWR: 1:1,06 at 1GHz
 Supply Voltage: 12V, min 9V DC
 Current Consumption: 80mA at 12V

**CX140D****49,50€**

1006853

2 cable connections, 1 x N connector

Max. Input Power: 600W PEP at 500MHz
 Insertion Loss: $\leq 0,2\text{dB}$ at 500MHz
 Crosstalk: $\geq 30\text{dB}$ at 500MHz
 VSWR: 1:1,1 at 1GHz
 Supply Voltage: 12V, min 9V DC
 Current Consumption: 160mA at 12V

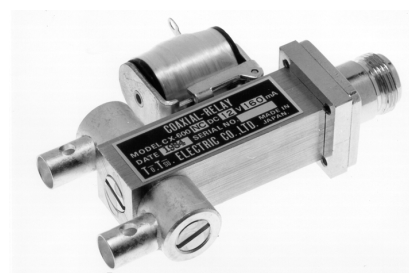**CX600NC****96,00€**

1006854

2 cable connections, 1 x N connector